

Spec Sheet



GALPRO8 - G8

8kg Auto Change Over LPG Regulator

Application:

Suited for 2 - 4 cylinder manifold systems in standard domestic and commercial applications.

Specifications:

- Adjustable
- Inlet Size: 1/4" Inverted Flare
- Outlet Size: 1/2" BSP
- Inlet Pressure: 1750 kPa
- Outlet Pressure: 3 kPa
- 8kg's p/hr
- 400MJ
- UL Approved


Available as a bare regulator (RG6020), or as part of a kit:

RG6020K:


- 8kg Auto Change LPG Regulator
- Galvanised chain kit(D shackle and clips)
- 1/2" Drain kit with test point ball valve
- 2 x 760mm Stainless steel, F-Class Hoses
- Stainless steel cover/weather proof shield

RG6021K:

- 8kg Auto Change LPG Regulator
- Galvanised chain kit(D shackle and clips)
- 1/2" Standard drain kit (test point on the bottom of the drain leg)
- 2 x 760mm Stainless steel, F-Class Hoses
- Stainless steel cover/weather proof shield

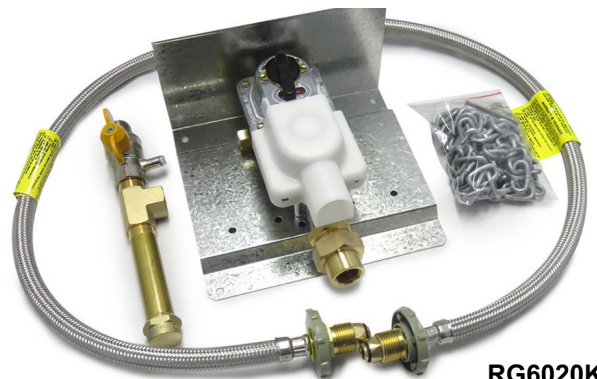

RG6020K

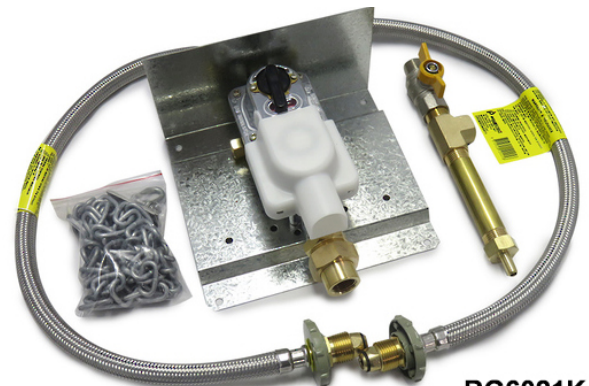

RG6021K



Where would we be without Gas?