

35kg 2nd Stage LPG Bare Regulator


RG8581

Application:

Suited for the secondary stage of a two-stage LPG Regulator manifold system, in residential or commercial applications.

Specifications:

- Adjustable
- Inlet Size: 3/4" BSP
- Outlet Size: 1" BSP
- Inlet Pressure: 10 - 100 kPa
- Outlet Pressure: 2.8 kPa
- 35kg's p/hr
- 1750MJ

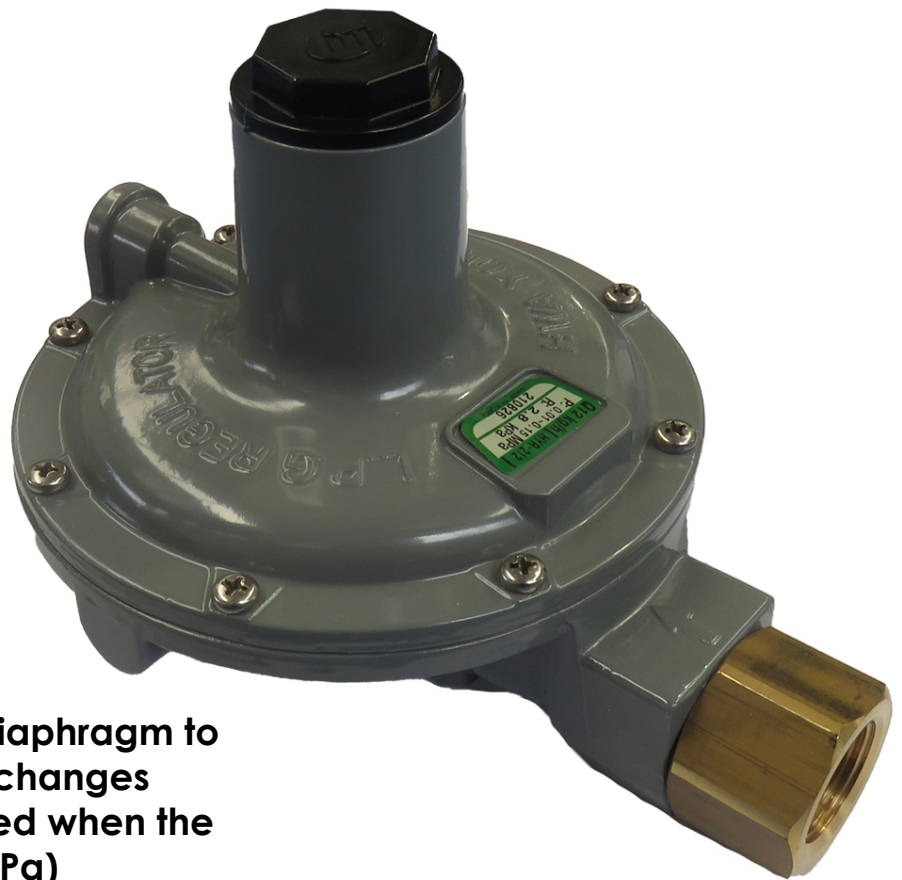

Features:

- Specially designed built-in diaphragm to respond quickly to pressure changes
- Built-in relief device (activated when the outlet pressure reaches 2.8 kPa)