

High Temperature Check Valve

Valve

SHW-WSP15

Application:

Spring loaded check valve for use in water pipelines and systems allowing water to flow in one direction only preventing backflow, siphoning and risk of contamination due to reverse flow.



Features:

- Non return valve, spring check valve
- Suitable for solar installations
- Suitable for vertical and horizontal installations
- Can be used on potable water applications and solar water
- Flow indicators on side of body
- High flow design with minimal head loss
- Protect equipment from backflow damage and water hammer
- Prevent siphoning and contamination due to reverse flow



Specifications:

- WaterMark approved
- Tested and certified to AS 1628
- Metal: DZR Brass
- Finish: Nickel Plated
- Temperature Range: 1°C to 60°C
- Max Pressure: 2000 kPa
- Diameter nominal: DN15
- Pressure nominal: PN25

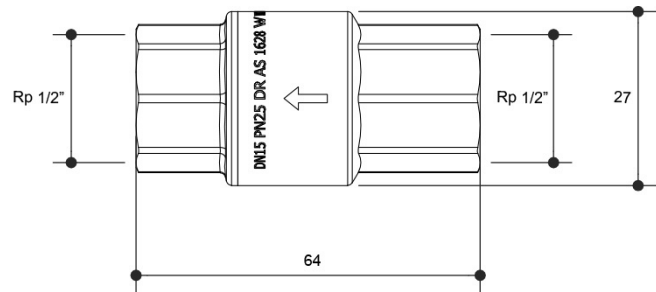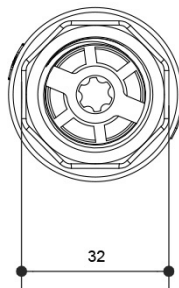

Where would we be without Gas?