

Insulated Copper Tube


- Coil

Application:

Suitable for gasfitting (LPG and Natural Gas), plumbing and drainage, as well as air conditioning and refrigeration..

Specifications:

- Insulated (PE Coated) copper
- Designed and approved to
 - AS 1571
 - AS 1432
- Chemical composition:
 - Copper: > 99.90%
 - Phosphorus: 0.015-0.040%
- Temper: O60
- Tensile Strength > 205 Mpa
- Coils available in various sizes and lengths

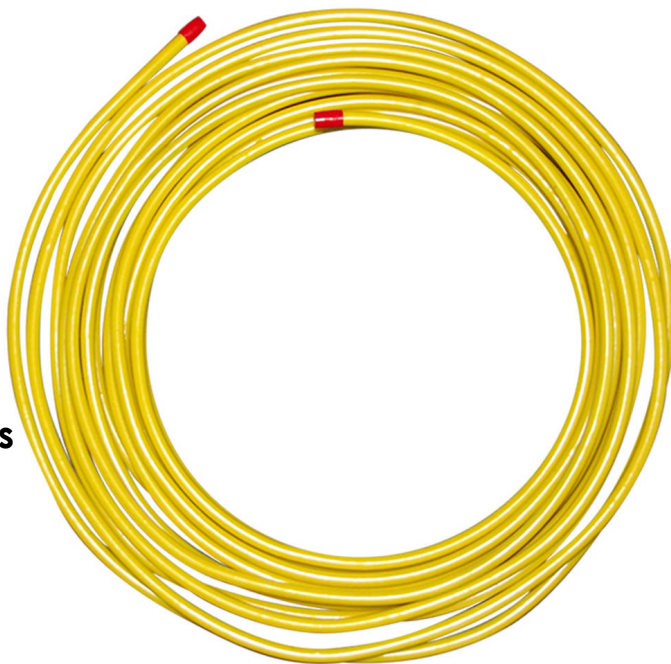

Available in the following sizes (ID):

- | | |
|-----------------------------------|-----------|
| • 5/16" (7.94mm) x 0.71mm x 15mtr | (CT05-CV) |
| • 3/8" (9.53mm) x 0.91mm x 15mtr | (CT06-CV) |
| • 1/2" (12.7mm) x 0.91mm x 15mtr | (CT08-CV) |

Where would we be without Gas?