

Insulated Copper Tube


- Coil

Application:

Suitable for gasfitting (LPG and Natural Gas), plumbing and drainage, as well as air conditioning and refrigeration.

Specifications:

- Insulated (PE Coated) copper
- Designed and approved to
 - AS 1571
 - AS 1432
- Chemical composition:
 - Copper: > 99.90%
 - Phosphorus: 0.015-0.040%
- Temper: O60
- Tensile Strength > 205 Mpa
- Coils available in various sizes and lengths

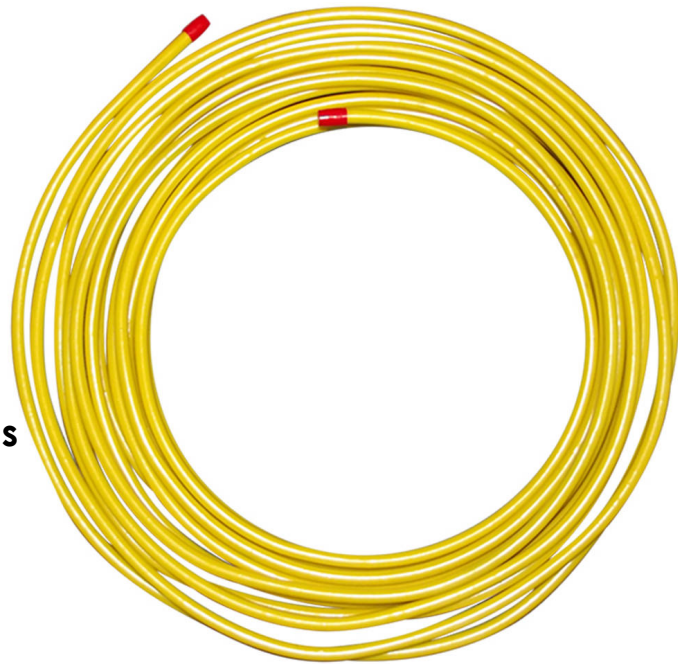

Available in the following sizes (ID):

- 5/16" (7.94mm) x 0.71mm x 15mtr
- 3/8" (9.53mm) x 0.91mm x 15mtr
- 1/2" (12.7mm) x 0.91mm x 15mtr

(CT05-CV) AS/NZS 1571, AS 1432
(CT06-CV) AS/NZS 1571, AS 1432
(CT08-CV) AS/NZS 1571, AS 1432

Where would we be without Gas?