

# Spec Sheet



## **GALPRO8 - G8**

### **8kg Auto Change Over LPG Regulator**

#### **Application:**

Suited for 2 - 4 cylinder manifold systems in standard domestic and commercial applications.

#### **Specifications:**

- Adjustable
- Inlet Size: 1/4" Inverted Flare
- Outlet Size: 1/2" BSP
- Inlet Pressure: 1750 kPa
- Outlet Pressure: 3 kPa
- 8kg's p/hr
- 400MJ
- UL Approved
- Internal viton seat, temps between -20°C to 210°C


**Available as a bare regulator (RG6020), or as part of a kit:**

#### **RG6020K:**

- 8kg Auto Change LPG Regulator
- Galvanised chain kit( D shackle and clips)
- 1/2" Drain kit with test point ball valve
- 2 x 760mm Stainless steel, F-Class Hoses
- Stainless steel cover/weather proof shield

#### **RG6021K:**

- 8kg Auto Change LPG Regulator
- Galvanised chain kit( D shackle and clips)
- 1/2" Standard drain kit (test point on the bottom of the drain leg)
- 2 x 760mm Stainless steel, F-Class Hoses
- Stainless steel cover/weather proof shield

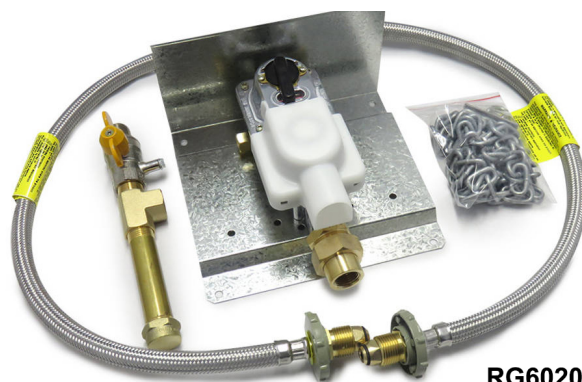

RG6020K



RG6021K



Where would we be without Gas?