

Emergency Stop Button

SVTELXAL

Application:


Clearly visible emergency stop button designed to immediately shut down a machine or process during an emergency, helping prevent injury, equipment damage or hazardous situations.

Specifications:

- Mounting: Surface mounted
- Pushbutton: 40mm red mushroom head, normally closed
- Contact operation: slow break
- Reset method: Turn to release
- Material: Polycarbonate, grey base with yellow cover
- Ingress protection: IP66
- Impact resistance: up to IK08
- Cable entry: 1x 14mm knockout, 2x 12mm knockouts
- Rated insulation voltage: 600 V
- Impulse withstand voltage: 6 kV
- Thermal current: 10 A
- Mechanical durability: 300,000 cycles
- Operating force: 44 N
- Contact material: Silver alloy
- Operating temperature: -40°C to 70°C
- Protection: resistant to dust, water, vibration and impact
- Conformity with IEC, UL, CSA standards and CE



Dimensions:

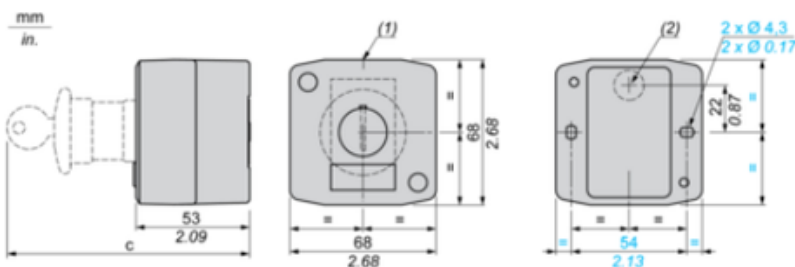

(1) 2 knock-outs for Pg 13.5 cable gland, maximum capacity 12 mm/0.47 in.

(2) Knock-out for cable entry, maximum capacity 14 mm/0.55 in.



Where would we be without Gas?