

## Mac Unions

### Specifications:

- Watermark approved
- DZR Brass
- Tested and certified to AS/NZS 3688
- Working Pressure 1600 kPa
- Suitable for LPG, NG and Water
- Working temperature 1°C to 95°C
- Conical connection (no washer or O-ring)

### Available in the following sizes:

#### Female/Female


- 1/8" (AK50450)
- 1/4" (AK50452)
- 3/8" (AK50454)
- 1/2" (AK50456)
- 3/4" (AK50460)
- 1" (AK50464)
- 1 1/4" (AK50466)
- 1 1/2" (AK50468)
- 2" (AK50470)

#### Male/Female

- 1/4" (AK51452)
- 3/8" (AK51454)
- 1/2" (AK51456)
- 3/4" (AK51460)
- 1" (AK51464)
- 1 1/4" (AK51466)
- 1 1/2" (AK51472)
- 2" (AK51476)

#### Male 3 Piece

- 3/4" (AK5220)

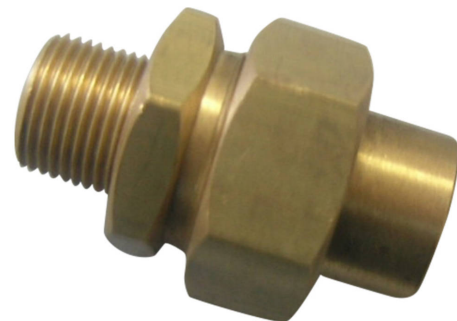

Where would we be without Gas?